

SFA Series

Ultra-thin Lip Flat Suction Cup Special for Plastic Bags

AIRBEST



PLASTIC BAG



HIGH SEALING

RoHS

Suction Cup

Features

- ◇ Ultra-thin sealing lip
- ◇ Support structure at the bottom


Advantages

- ◇ Suitable for film products, can fit workpiece closely
- ◇ Prevent the workpiece from being sucked into suction cup and wrinkling
- ◇ Food grade silicone, suitable for food package



Applications


- ◇ Handling plastic film packaging bag
- ◇ Open film packaging bag in packaging production line

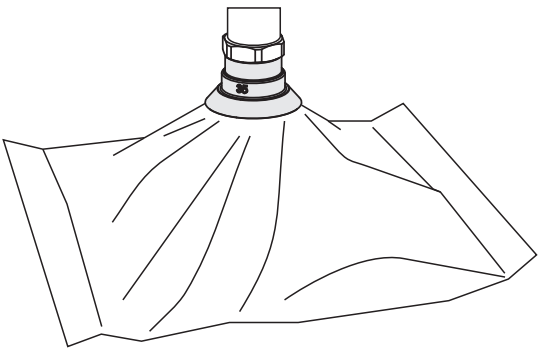

Structure

- ◇ Suction cup and fitting are split structure design, wearing parts can be replaced separately

In same series, replacement suction cup and fitting can be combined on request.

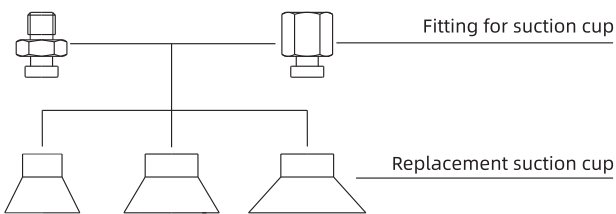

SZ
SP3
SUF
SAN
SAO
SOFA
STP
SFT
SFA
SBL
SBLP
SBS
SFP
SBP
SXP
SGP
SBOF
STC
SFF
SOB
SOF
SOG
SFM
SOM
SBF
SDM
SFU
SFK
SHT
SDL
SFG
SFD
SB
SBA
SF
SU
SPA
SPF
SPC
SPJ
SPU
SH
SHB
SBB
SOP
SNP

How to order

SFA 20 S - M5M


① ② ③ ④

① Series	② Diameter	③ Material & Hardness	④ Connection thread
SFA	20 - ϕ 20mm 25 - ϕ 25mm 35 - ϕ 35mm 50 - ϕ 50mm	S - Silicone 40	Nil - Suction cup only M5M - M5×0.8 male thread M5F - M5×0.8 female thread G1M - G1/8 male thread M8F - M8×1.25 female thread G2M - G1/4 male thread G3M - G3/8 male thread

Selection


Model	Connection thread M - Male thread		F - Female thread	MPQ pcs
SFA20S	SFA20S-M5M	SFA20S-G1M	SFA20S-M5F	5
SFA25S	SFA25S-M5M	SFA25S-G1M	SFA25S-M5F	5
SFA35S	SFA35S-G2M	SFA35S-G3M	SFA35S-M8F	5
SFA50S	SFA50S-G2M	SFA50S-G3M	SFA50S-M8F	1

Dimensions(mm) - Suction cup only

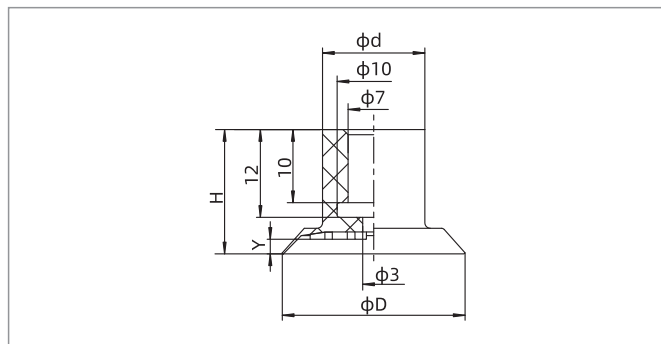

SFA20-25

Model/Size	D	H	d	Y
SFA20S	20	17	13	1.6
SFA25S	25	17	14	2

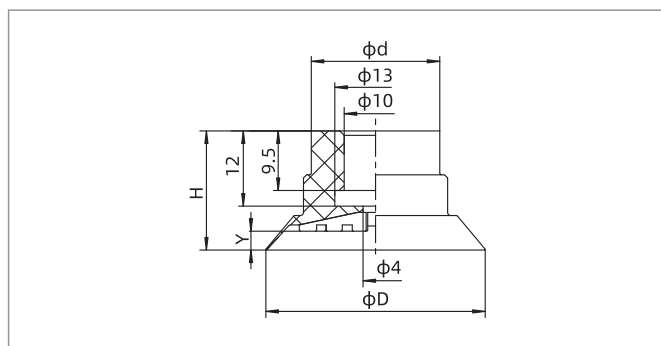

SFA35-50


Model/Size	D	H	d	Y
SFA35S	35	19	20.5	3
SFA50S	50	22	20.5	4.5

SFA Series


AIRBEST

Ultra-thin Lip Flat Suction Cup Special for Plastic Bags


Dimensions(mm) - Suction cup with fitting

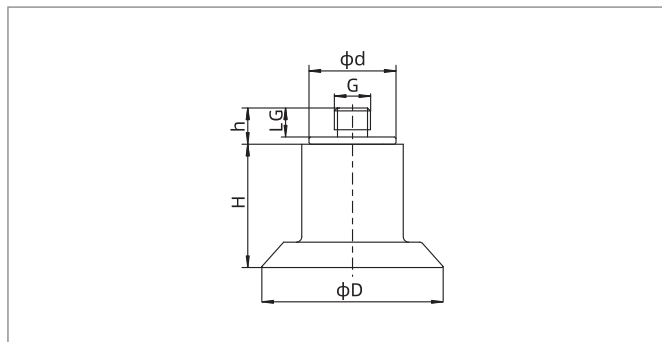

SFA - Male thread connection

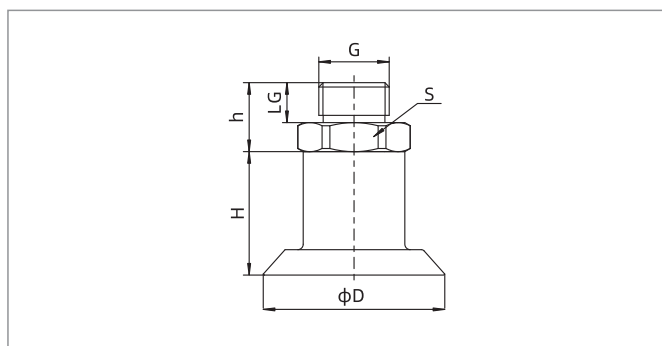

SFA - Male thread connection

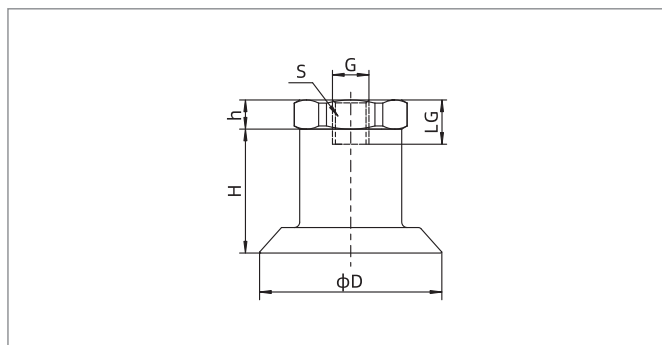

SFA - Female thread connection

◇ Note: The dimensional tolerance conforms to GB/T3672.1-2002-1 M3 rubber product dimensional tolerance standard

Model/Size	D	H	h	G	LG	d
SFA20S-M5M	20	17	5	M5×0.8	4	12
SFA25S-M5M	25	17	5	M5×0.8	4	12

Model/Size	D	H	h	G	LG	S
SFA20S-G1M	20	17	9.5	G1/8	5.5	14
SFA25S-G1M	25	17	9.5	G1/8	5.5	14
SFA35S-G2M	35	19	11.5	G1/4	6.5	21
SFA35S-G3M	35	19	11.5	G3/8	6.5	21
SFA50S-G2M	50	22	11.5	G1/4	6.5	21
SFA50S-G3M	50	22	11.5	G3/8	6.5	21

Model/Size	D	H	h	G	LG	S
SFA20S-M5F	20	17	4	M5×0.8	5	14
SFA25S-M5F	25	17	4	M5×0.8	5	14
SFA35S-M8F	35	19	6	M8×1.25	8	21
SFA50S-M8F	50	22	6	M8×1.25	8	21

Mounting parts

Item	Model M - Male thread	F - Female thread	Applicable suction cup
Fitting for suction cup	PJS-M5M-SFA20	PJS-M5F-SFA20	SFA20,25
	PJS-G1M-SFA20	-	SFA20,25
	PJS-G2M-SFA50	PJS-M8F-SFA50	SFA35,50
	PJS-G3M-SFA50	-	SFA35,50

Suction Cup

SZ

SP3

SUF

SAN

SAO

SOFA

STP

SFT

SFA

SBL

SBLP

SBS

SFP

SBP

SXP

SGP

SBOF

STC

SFF

SOB

SOF

SOG

SFM

SOM

SBF

SDM

SFU

SFK

SHT

SDL

SFG

SFD

SB

SBA

SF

SU

SPA

SPF

SPC

SPJ

SPU

SH

SHB

SBB

SOP

SNP