

AZW Series

Large Flow Integrated Vacuum Generator



BIO-PHARMACEUTICAL



FOOD INDUSTRY

Features


- ◇ Built-in high performance vacuum cartridge
- ◇ External silencer
- ◇ Centralized air supply, solenoid valves of each station controll separately
- ◇ Multi-station, large flow, integrated design

Advantages

- ◇ Easy installation, easy maintenance, it can be replaced by users themselves
- ◇ Reduce product noise most
- ◇ Customers can open or close according to the actual application conditions to save air source
- ◇ High vacuum level, large flow, it can reach high vacuum level in a short time


Applications

- ◇ Suitable for multi-station vacuum grasping applications
- ◇ Suitable for the occasions with high demand on the evacuation time
- ◇ Suitable for fast evacuation occasions in medical and food industry

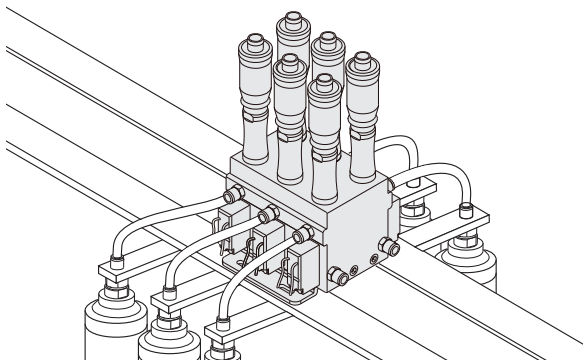

Structure

- ◇ (1) Vacuum port
- ◇ (2) Air supply valve
- ◇ (3) Mounting bracket
- ◇ (4) Silencer
- ◇ (5) Vacuum cartridge
- ◇ (6) Air supply port

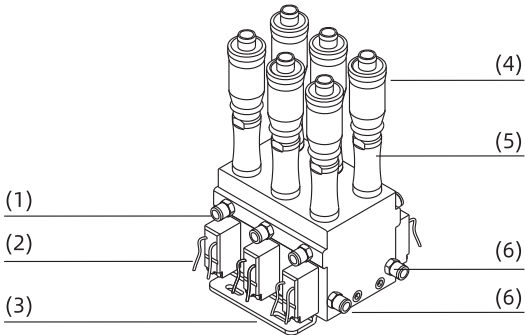

Vacuum Generator

AZK

AZX

AZD

AGS

AGB

AGP

AGX

AGE

ABM/ABX

ABM/ABX
组合式

AMC

AM/AL/AH

AM/AL
组合式

AMD

AZW

AZR

ABT

ABP

ABQ

AEVC

AZL

AZH

AZU

ACV

ASBP

ALS

ACP

ACPF

ACPS

APB

How to order

AZW - 06V

①

②

① Series	② Vacuum stack quantity
AZW	03V - 3 stacks 06V - 6 stacks

Technical parameters

Model	Air supply pressure range bar	Rated air supply pressure bar	Max.vacuum level -kPa	Max. vacuum flow NL/min	Air consumption NL/min	Noise level dB(A)
AZW	4.0~7.0	5.0	95	140	135	74



Model	Solenoid valve rated working voltage V	Solenoid valve status	Solenoid valve rated power W	Working temperature ℃	Weight		Recommended hose dia.mm	
					03V	kg 06V	Air supply port P	Vacuum port V
AZW	DC24	Normally closed(NC)	5.4	0~60	1.2	2.3	φ10	φ10

Vacuum flow(NL/min) at different vacuum levels(-kPa)

Model	Air supply pressure bar	Air consumption NL/min	0	10	20	30	40	50	60	70	80	90	Max. vacuum level -kPa
AZW	5.0	135	140	117	106	76	54	36	26	18	11.5	5.2	95

Evacuation time(s/L) to reach different vacuum levels(-kPa)

Model	Air supply pressure bar	Air consumption NL/min	1	20	30	40	50	60	70	80	90	Max. vacuum level -kPa
AZW	5.0	135	0.01	0.02	0.08	0.23	0.43	0.71	1.04	1.61	3.72	95

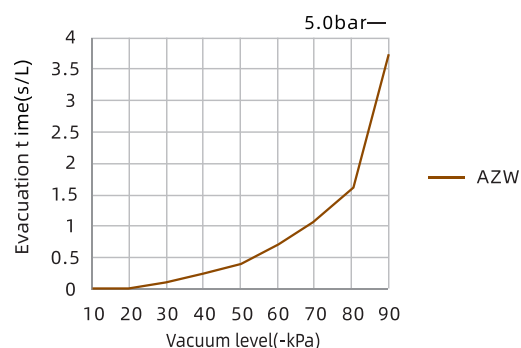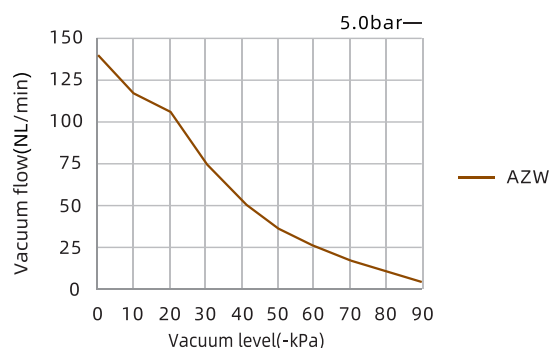


AZW Series


Large Flow Integrated Vacuum Generator




Dimensions(mm)

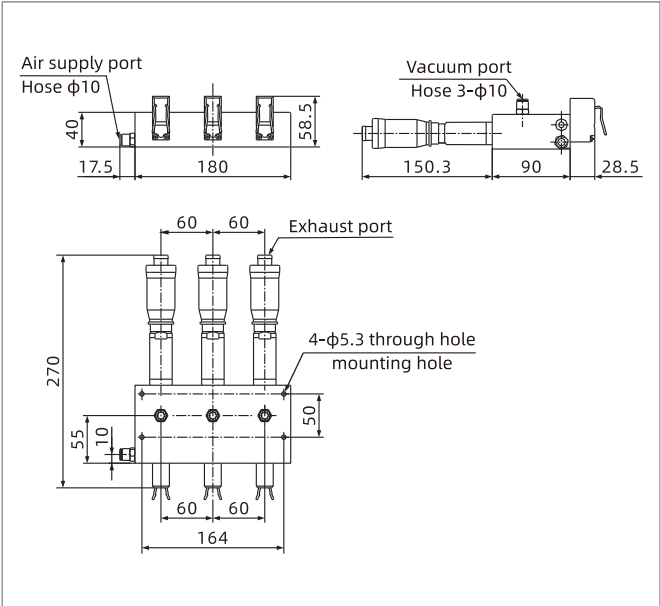


AZW-03V

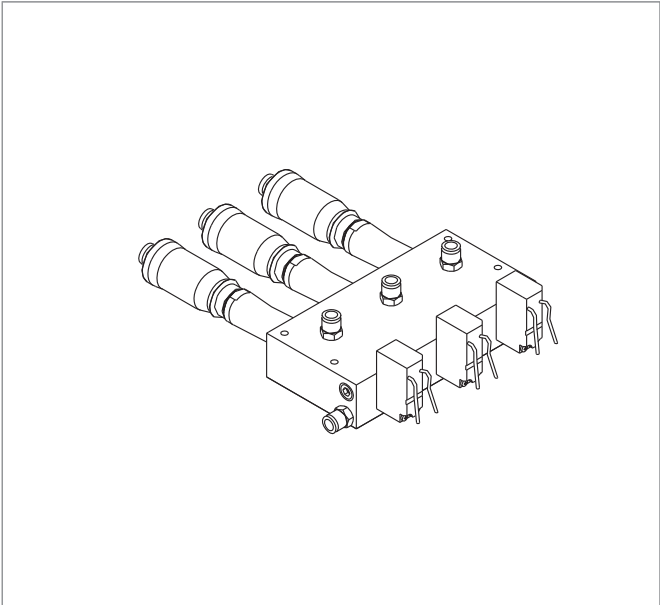

AZW-03V Schematic diagram

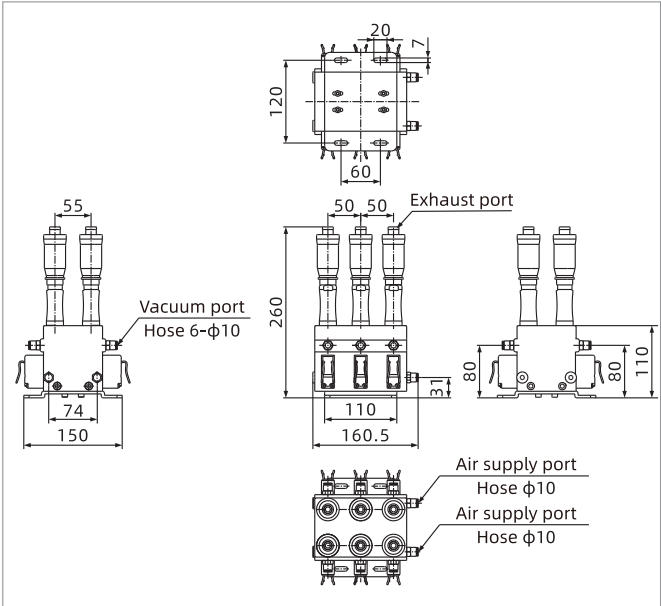

AZW-06V

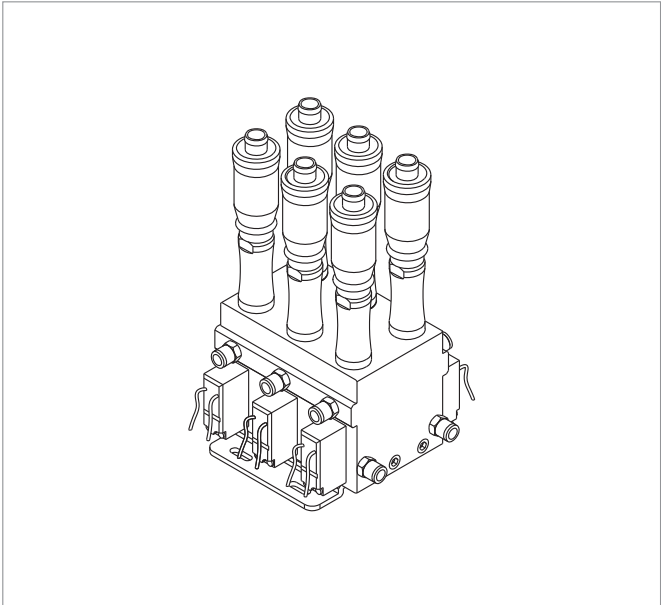

AZW-06V Schematic diagram

Vacuum Generator
AZK
AZX
AZD
AGS
AGB
AGP
AGX
AGE
ABM/ABX
ABM/ABX 组合式
AMC
AM/AL/AH
AM/AL 组合式
AMD
AZW
AZR
ABT
ABP
ABQ
AEVC
AZL
AZH
AZU
ACV
ASBP
ALS
ACP
ACPF
ACPS
APB